

ENVIRO PELLET STOVES AT A GLANCE

S= STANDARD EQUIPMENT
O= OPTIONAL EQUIPMENT

FEATURES

	EF2 FS	EF2i FS	EF 3Bi FS	EF 4i FS	EF 3 Bi FPI	EF 4i FPI
Nickel Door cover	O	O	O	O	O	O
24kt Gold Door cover	O	O	O	O	O	O
24kt Gold Bars	-	-	-	O	-	O
Gold Louvers	S	S	S	-	S	-
Large full pedestal ash pan	S	S	S	S	-	-
Thermostat	-	-	O	-	O	O
Power usage (ignitor on)	-	450W	520W	520W	520W	520W
Power usage (ignitor off)	250W	250W	250W	250W	250W	250W
24kt Gold top inset	O	O	O	-	O	-
Hopper lid handle	S	S	S	S	S	S
Heat exchanger	S	S	S	S	S	S
Fire box brick lining	S	S	S	S	S	S
160 CFM Convection fan (variable speed)	S	S	S	S	S	S
Concealed electronic control panel	S	S	S	S	S	S
Ignitor	-	S	S	S	S	S
Oversized surround	-	-	-	O	O	O
EF log set	O	O	O	-	O	-
Zero clearance kit	-	-	-	O	O	-
Concealed Door Handle	-	-	S	S	S	S
Mobile Home Approved***	S	-	S	S	S	S

SPECIFICATIONS

	EF2 FS	EF2i FS	EF 3Bi FS	EF 4i FS	EF 3 Bi FPI	EF 4i FPI
Fuel Capacity	55lbs	55lbs	55lbs	55lbs	55lbs	55lbs
Weight of complete unit	240lbs	240lbs	240lbs	190lbs	240lbs	190lbs
Btu(kW) input (on high)*	34,000 (10.0)	34,000 (10.0)	40,000 (11.7)	35,000 (10.1)	40,000 (11.7)	35,000 (10.2)
Btu(kW) input (on low)*	6,500 (1.9)	6,500 (1.9)	6,500 (1.9)	6,500 (1.9)	6,500 (1.9)	6,500 (1.9)
Area heated**	900-1,500ft²	900-1,500ft²	1,000-1,800ft²	800-1,400ft²	1,000-1,800ft²	800-1,400ft²

DIMENSIONS AT BACK OF UNIT

	EF2 FS	EF2i FS	EF 3Bi FS	EF 4i FS	FPI	EF 4i FPI
Width X Depth	22" X 24"	22" X 24"	22" X 24"	22" X 21.5"	22" X 24"	22" X 20.5"
Height	30.5"	30.5"	30.5"	28.5"	22.75"	21.1"
A. Front of unit on hearth	-	-	-	-	13"	9"
B. Recedes depth into fireplace	-	-	-	-	11"	11.5"
Standard Surround (H X W)	-	-	-	-	30" X 40"	28" X 40"
Oversized Surround (H X W)	-	-	-	-	33" X 46"	33" X 46"
C. Side wall to unit	6"	6"	6"	6"	8"	9"
D. Back wall to unit	1"	1"	1"	2"	-	-
E. Wall to corner of unit	1"	1"	1"	2"	-	-
F. Floor protector (in front of unit) ††	6"	6"	6"	6"	6"	6"
G. Top of unit to mantle	-	-	-	-	8"	8"
H. Unit top to surround top	-	-	-	-	8"	8"
I. Unit to mantle pillar	-	-	-	-	6"	6"

ALCOVE INSTALLATION

Model FS may be installed in an alcove at least 36" wide x 48" high x 30" deep.

***Enviro Fire pellet appliances are approved for mobile home installations once certain criteria are met.

* Figures will vary considerably with individual conditions and fuel quality.

** Figures will vary considerably with floor plan, house layout and heat loss of the house.






†† Floor protector must be the full width and depth of the unit plus extend 6" in front of the unit.

Specifications are subject to change without notice.

These units must be installed by a qualified dealer.




Enviro Fire Pellet Stoves have been tested and listed by Intertek Testing Ltd to Standards: CE Approved for Sale in Europe UL-1482/ULC S627 CSAB366.2M/ULC S628 UL907/UL-127 ULC S610



ENVIRO PELLET STOVES

Home is where the hearth is

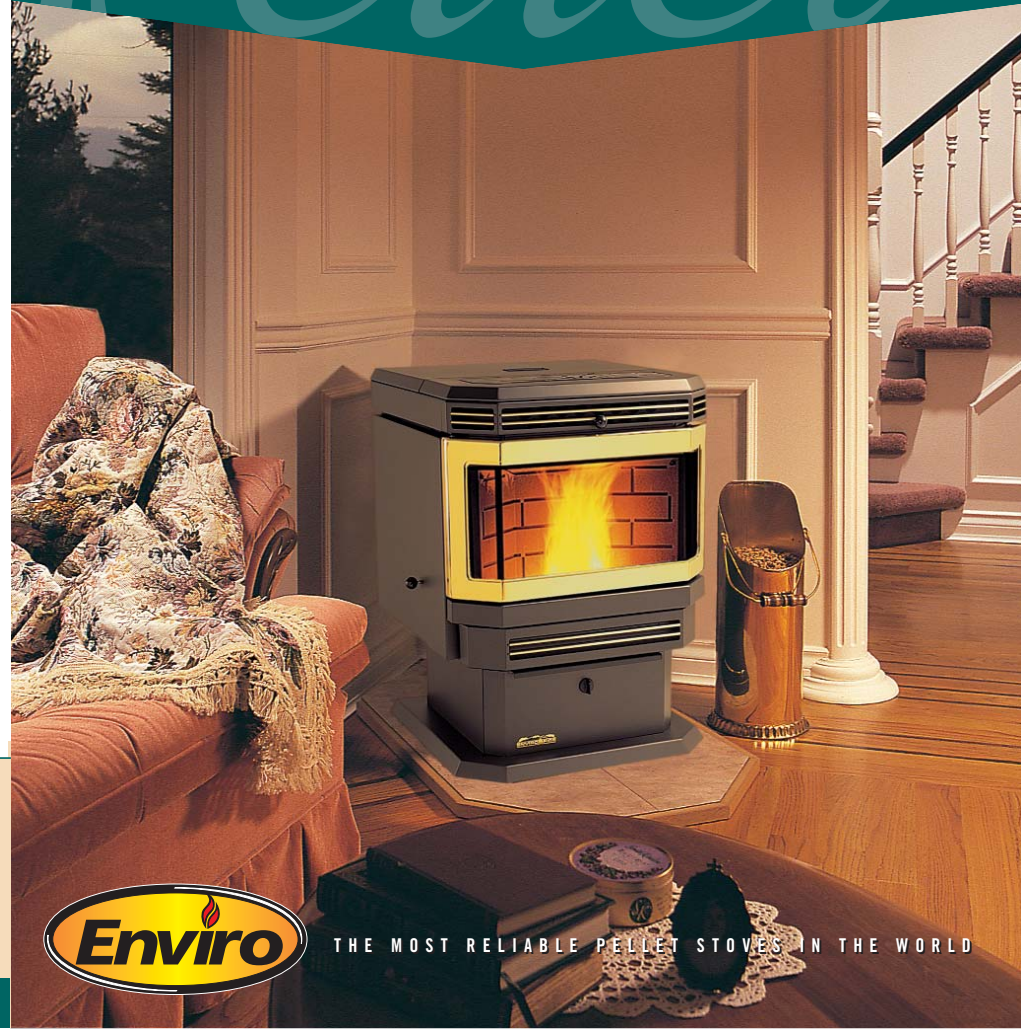

THE MOST RELIABLE PELLET STOVES IN THE WORLD

THE ENVIRO FAMILY OF PELLET HEATING PRODUCTS



MODEL: EF2i FS 6D



MODEL: EF2 FS PD



MODEL: EF3 Bi FS 6D



MODEL: EF3Bi FP1 6D

MODEL: EF3Bi FS PD

EF2/EF2i These classic heating products from Enviro have beautifully clean lines. They are built to the same high standards of quality and performance that you have come to expect from all Enviro models. On EF 2i models, with the built in ignition system, you can turn on your heat at the flick of a switch. Your home will heat up quickly with up to



Hopper

34,000 BTUs of heat input, through our solidly constructed heat exchanger and 160 cfm convection fan. The 24kt gold or nickel door cover and top inset options

allow you to dress your stove to blend in with any décor. Form and function are blended together to create a truly marvellous heater.



24kt gold top inset - EF 2 / EF2i

EF3 Bi The EF 3 Bi produces the most heat of any Enviro model. A double row of heat exchange tubes and up to 40,000 BTUs of heat input make the EF 3 Bi a leader in the heating industry.



Flame path on realistic log set

Its beautiful design adds a touch of elegance to your home.

The three piece glass bay door provides an excellent view of your fire from almost any angle, while the beautiful flame patterns will entertain you on those cold winter nights. You will enjoy a winning combination of performance, function and beauty. The EF 3 Bi offers a fully automatic ignition system, a large capacity pedestal ash pan and easy clean out ports as standard features.


The 24kt gold or nickel door cover and top inset options allow you to dress your stove to blend in with any décor.



24kt gold top inset - EF 3Bi



Control Panel

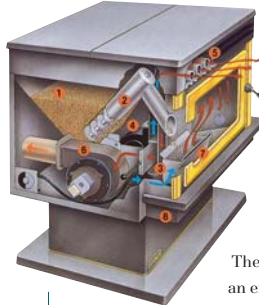

MAJOR COMPONENTS OF OUR PELLET STOVES

1. Hopper
2. Auger
3. Combustion Air
4. Convection Fan
5. Exchanger Tubes
6. Exhaust Fan
7. Burn Pot
8. Ash Pan

EF4i With the EF 4i, the next generation of pellet stoves has arrived. This delightfully sleek package retains all the tried and tested technology that has made Enviro the most reliable pellet heating product in the world. Designed to fit the needs of today's lifestyle, the small footprint of the EF 4i lets you place these heating products almost anywhere.



Freestanding Ash Pan

The heat from the 35,000 BTUs is transferred into the room through an ultra efficient heavy-duty heat exchanger. The design of this exchanger and the airflow channels make the EF 4i one of the quietest pellet products available. The top of the stove opens up to give you complete access to the large 55lb. hopper.

The three piece glass bay door provides an excellent view of your fire from almost any angle. Optional 24kt gold or nickel door covers and bars are available.



Hopper Lid Handle

EF4i models are shown with optional gold bars



MODEL: EF4i FS 6D



MODEL: EF4i FS PD

MODEL: EF4i FP1 6D

PRODUCT HIGHLIGHTS

QUALITY & VALUE

All Enviro pellet stoves are manufactured to the highest standards of quality and performance. Attention to the details that consumers want is why Enviro pellet fireplaces and stoves rank amongst the world's leaders. Available in 20 countries spread over 4 continents, Enviro heating products represent the best value available today.

SAFETY

Our heating products come with numerous safety features to give you peace of mind. As well, temperature and vacuum sensors operate together to ensure that your Enviro product delivers years of worry free operation.

EFFICIENCY & ECONOMY

Enviro pellet stove products deliver up to 83% efficiency. A heavy duty heat exchanger and a 160 CFM convection fan ensure that the heat is transferred quickly into your house. Today, with other energy sources so expensive, Enviro efficiency translates into a very low cost to heat your home.

EASE OF OPERATION

Most Enviro pellet stove heating products are available with large full pedestal ash pans and automatic igniters. Easy cleanout ports and burn pot liners add to the low maintenance requirement of our products and the specially designed air wash system keeps the door glass cleaner, even at low burning settings.

Our easy-to-use "Dial-A-Fire", controls the heat input from a minimum of 6,500 BTUs to a maximum of 40,000 BTUs, depending on the model and automatic ignition systems deliver heat at the flick of a switch. The unique design of the heat exchanger and exhaust system make Enviro one of the quietest pellet stoves available.

ENVIRONMENTALLY FRIENDLY

There are two important reasons why heating with an Enviro pellet stove product is one of the most environmentally friendly ways to heat your home.

1. Pellet fuel is a sawdust byproduct from the waste of trees manufactured into lumber.

2. Enviro pellet stove heating products burn the pellets at a high air to fuel ratio to burn off harmful gasses and carbons. While this heat warms your home, the exhaust emissions of less than one gram per hour provide trees the carbons necessary for growth.

In effect, an Enviro pellet stove heating product is part of a closed ecological system, with no increase or change to the environment.

